


Pivots for horizontally pivoted windows
Series HUECK 2.1

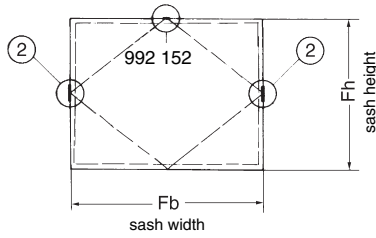

Series

2.1 EU

① **Central lock**
Z 992 150 02
Z 992 150 64
4-point locking with mechanism for mini-ventilation, complete, excluding operating rods
P 496 099

Z 905 561
Drilling jig, suitable for central lock Z 992 150

Central lock
Z 992 152
Inserted depending on sash and installation height

② **Pair of pivots for horizontally pivoted windows (Two-point bearing)**


Z 992 682 02 coated
Z 992 682 64
max. sash weight 150 kg

Z 992 814
Drilling jig, suitable for two-point bearing Z 992 682

Limiting stay-bar
Z 992 188
Adjustable opening width


Plastic clink stop
Z 907 409 white
for an opening position of 180° (cleaning position)

Application and sash size diagrams for HUECK Series 2.1 pivoting sash with central lock Z 992 150 and pivot for horizontally pivoted window Z 992 682

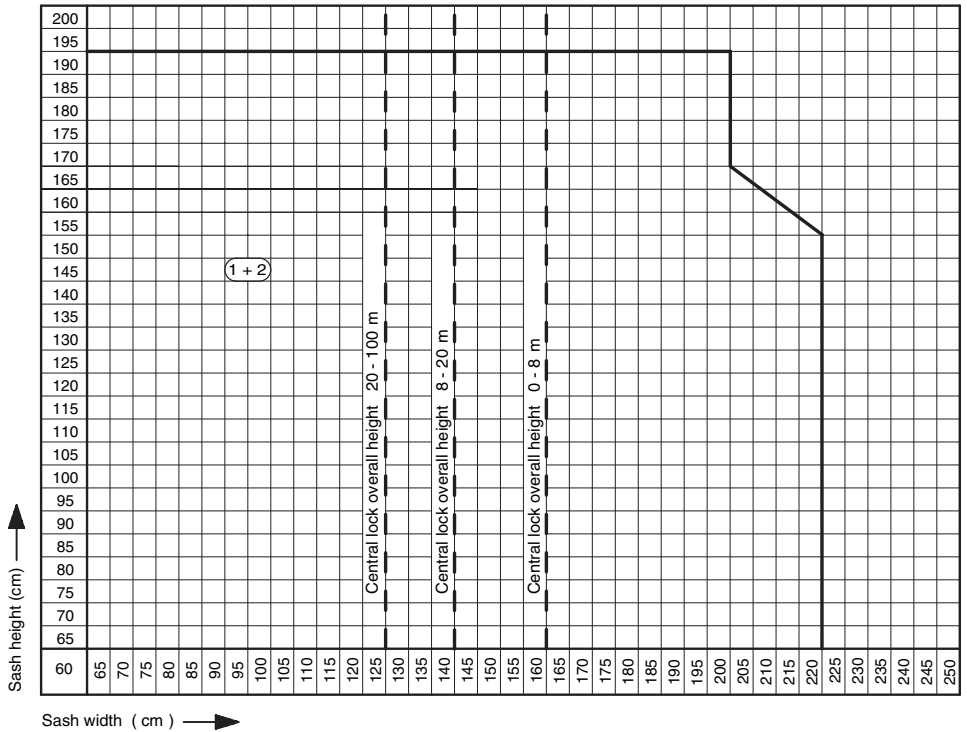

① **Central lock**
+
② **Bearing for 150 kg**
max. sash weight

B 542 206



Central lock Z 992 152 is to be used in case of an overall height of 0 – 8 m from sash width 1600 mm

8 – 20 m overall height from sash width 1400 mm

20 – 100 m overall height from sash width 1250 mm