









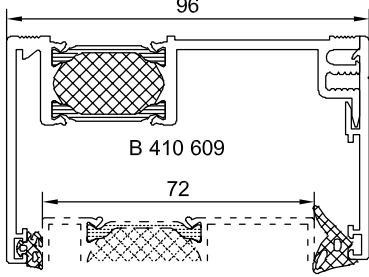

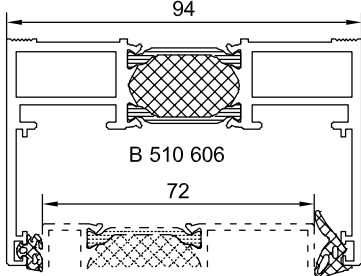



	Series				Series		
	1.0	1.0 IF	A 72		1.0	1.0 IF	A 72
 <p>Z 904 107 22 Expansion gasket, made of EPDM, black, suitable for expansion profiles for housing a material thickness of 2 – 3 mm, e.g. P 496 100</p>  <p>P 496 100</p> <p>The indicated average assembly distance allows for a compensation of movement of ± 3 mm.</p> <p>If cladding sheets are used, 33 mm must be added to the average assembly distance.</p>	•	•	•	 <p>Z 904 088 Connecting gasket (plaster joint), made of EPDM, black, 35 mm wide, with notch for tearing off, for frame profiles with pick-up for snap-on profile</p>	•	•	•
				<p>Z 904 303 22 Connecting gasket, similar to Z 904 088, but 45 mm wide, without notch for tearing off, for frame profiles with pick-up for snap-on profile</p>	•	•	•
 <p>Z 904 126 22 Expansion gasket, made of EPDM, black, suitable for expansion profiles with accommodating channel, as above</p> <p>If an expansion profile is used, the required static values for the individual profiles must be observed!</p>	•	•	•	 <p>Z 909 876 22 Connecting gasket, made of EPDM, light grey, 30 mm wide, with notch for tearing off, for frame profiles with pick-up for snap-on profile</p>	•	•	•
 <p>Z 911 577 22 Expansion gasket, made of EPDM, black, suitable for expansion profiles with accommodating channel, as above</p> <p>If an expansion profile is used, the required static values for the individual profiles must be observed!</p>	•	•	•	 <p>Z 911 081 22 Glazing gasket -external- made of EPDM, black, 4 mm spacer, for all sash profiles, fixed frame profiles and transom profiles</p>	•		
				 <p>Z 911 078 22 Glazing gasket -internal- made of EPDM, black, for gap dimensions between 6.5 and 9 mm, can be used with glazing gaskets -external- in accordance with the glazing table</p>	•		
				 <p>Z 911 080 22 Glazing gasket -internal- made of EPDM, black, for gap dimensions between 7.5 and 10.5 mm, can be used with glazing gaskets -external- in accordance with the glazing table</p>	•		
 <p>Z 906 481 22 Expansion gasket, made of EPDM, black, with notch for tearing off for profile P 572 111 for housing a material thickness of 2 mm</p>			•	 <p>B 410 609</p>			
 <p>Z 912 535 22 Gasket coupling, made of EPDM, black, for profile extensions with supplementary profile P 496 111 Gasket joints must be sealed</p>	•			 <p>B 510 606</p>			
 <p>Z 902 161 Gasket cord, EPDM, black, for sealing the outer snap-on profiles</p>	•	•	•				