HUECK HARTMANN

Request / Order form for stepped insulating glass for top-hung projecting out windows

72 E 2.1

1) **request** ☐ 1) **order** ☐			page number
customer / invoicing	commission	date of offer delivery date	stamp, date, signature
glass supplier	delivery address		

glass type / pane structure

		yes	no
external pane, both glass edges with hem	da		
space between panes	S Z R		
UV-resistant edge bonding. For an optically uniform colour. In the area of edge bonding and glass projection Ü 1, Ü 2, Ü 3 including load-bearing adhesive joint, the external pane on pos. 2 is covered with continuous black silicone sealing material as au-thorized with a thickness of approx. 0.2 to 0.3 mm.			
internal pane	di		
Ug	W/m^2K		
R_w	dB		
SG-version glass delivery			
including gluing			
including spacing strip, 15 mm wide, for joint thickness S1, 6.4 mm, load-bearing joint thickness at least 6 mm			

secured mechanically by means of supporting profile 1) ☐

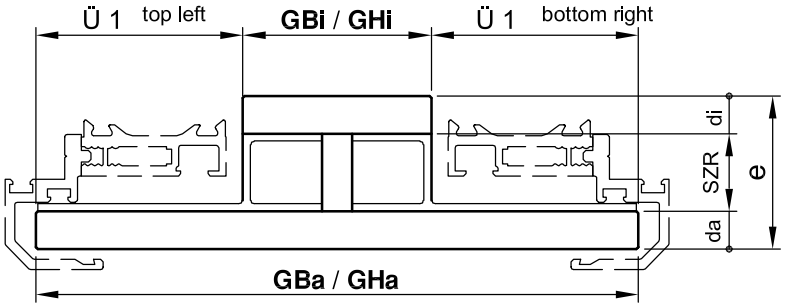

SG-version 1) ☐

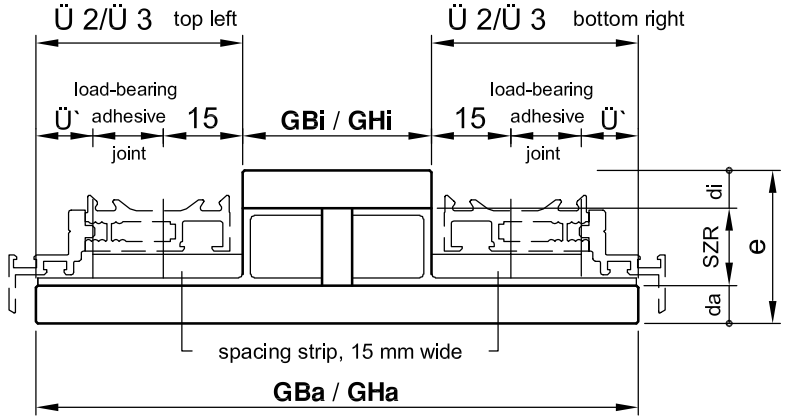

serial number	external pane **GBa** x **GHa** [mm]	internal pane **GBi** x **GHi** [mm]	glass projection Ü..... 1) continuous 44 mm in case of Ü1 74 100 0	continuous 46 mm in case of Ü2 74 101 0	continuous 56 mm in case of Ü3 74 102 0	top and bottom 46 mm in case of Ü2 74 101 0	top and bottom 56 mm in case of Ü3 74 102 0	left and right 46 mm in case of Ü2 74 101 0	left and right 56 mm in case of Ü3 74 102 0	quantity	for position
	x	x									
	x	x									
	x	x									
	x	x									

1) please check where appropriate