



Frame profile Sash profile

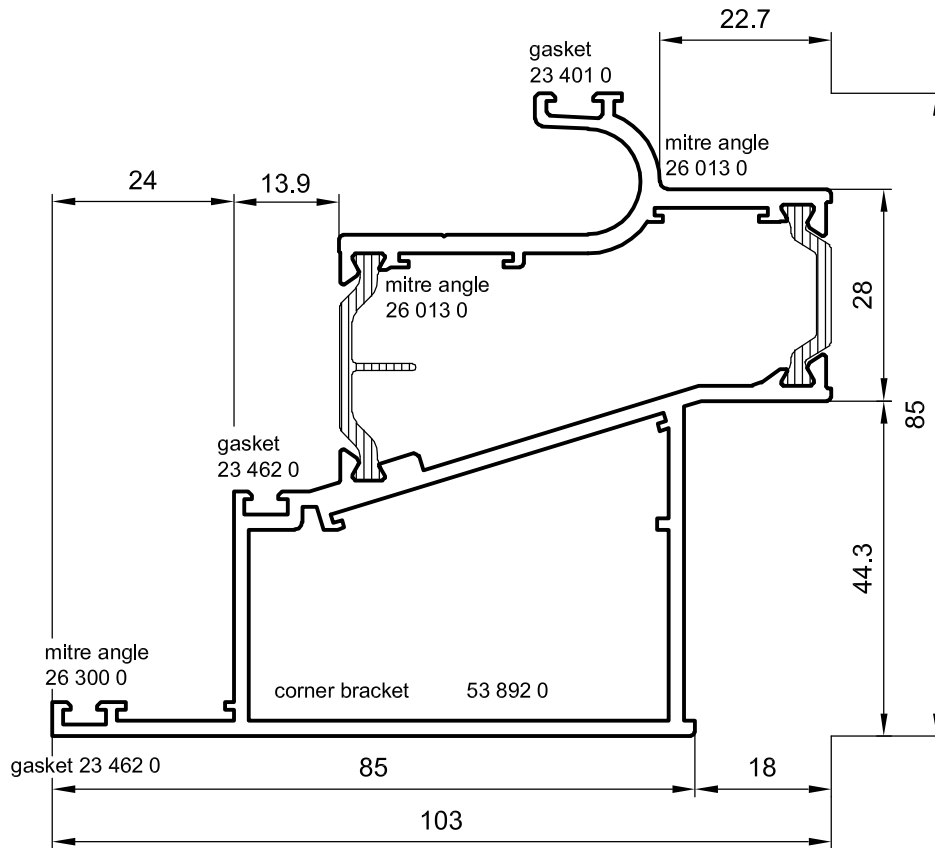


52 482 0

A.a.o. 411 mm
A.m. 85 mm
A.P.a. 239 mm
52 482-25
A.P.i. 345 mm
52 482-15

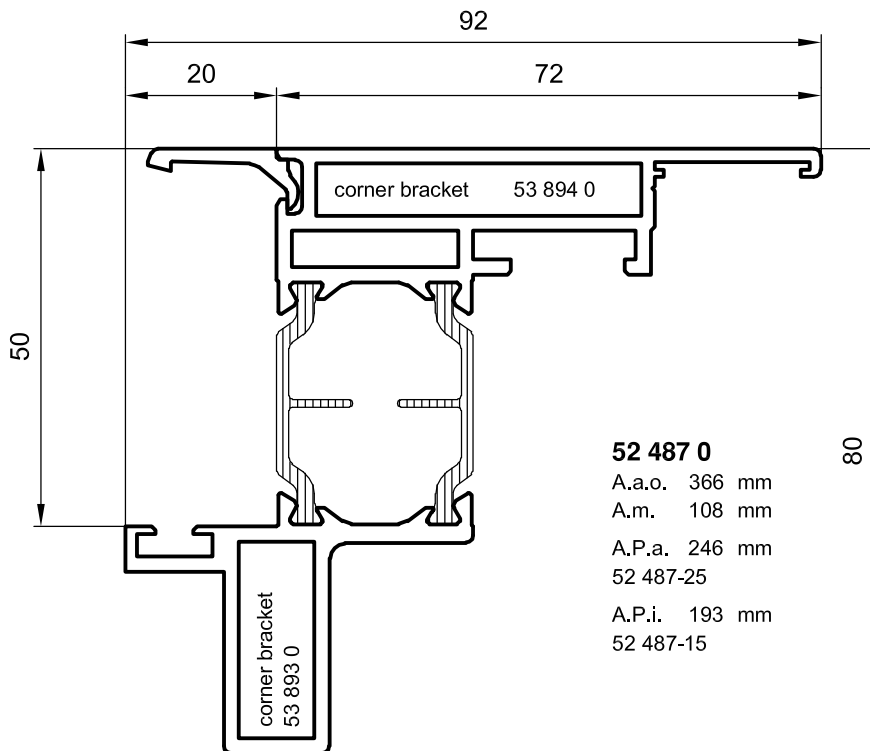

76 940 0

A.a. 52 mm
A.m. 17 mm
for anodized sash profiles only




52 487 0

A.a.o. 366 mm
A.m. 108 mm
A.P.a. 246 mm
52 487-25
A.P.i. 193 mm
52 487-15

76 945 0

A.a. 55 mm
A.m. 17 mm



A.a.o. = outer perimeter without insulation zone
A.P.a. = perimeter outer profile
A.a. = outer perimeter

A.m. = perimeter mechanical
A.P.i. = perimeter inner profile